

GRUNDFOS LCSE

END SUCTION TYPE LCSE (CLOSE COUPLED, SPLIT COUPLING, END SUCTION)

Key Benefits:

- Features a 35% smaller footprint than frame mount design
- Speeds installation thanks to reduced weight
- Eliminates coupling alignment requirements, laser alignment costs and baseplate grouting requirements
- Allows rapid mechanical seal access without motor removal through service friendly design
- Provides seamless integration with Grundfos MLE integrated motor, drive and control for an all-in-one solution
- Allows for intuitive handheld pump control via Grundfos GO

Applications:

- Chilled water
- Condensed water
- Hot water
- District cooling and heating systems
- Air conditioning
- General industry
- Water utility

For consulting engineers, visit **GrundfosExpress.com** for technical information. For Grundfos sales and distributors, visit **GrundfosExpressSuite.com**
www.grundfos.us/LCSE





Grundfos LCSE Technical Data

Chart of Performance Range

	LCSE
Flow, Q	10 to 1900 gpm
Head, H	10 to 380 ft
Fluid temp.	10° to 275° F
Max. working pressure	175 psi*
HP range/Speed	3 to 30 hp/3600 RPM
	3 to 25 hp/1800 RPM
Discharge/Suction sizes	1" to 8"

* 250 psi rating available

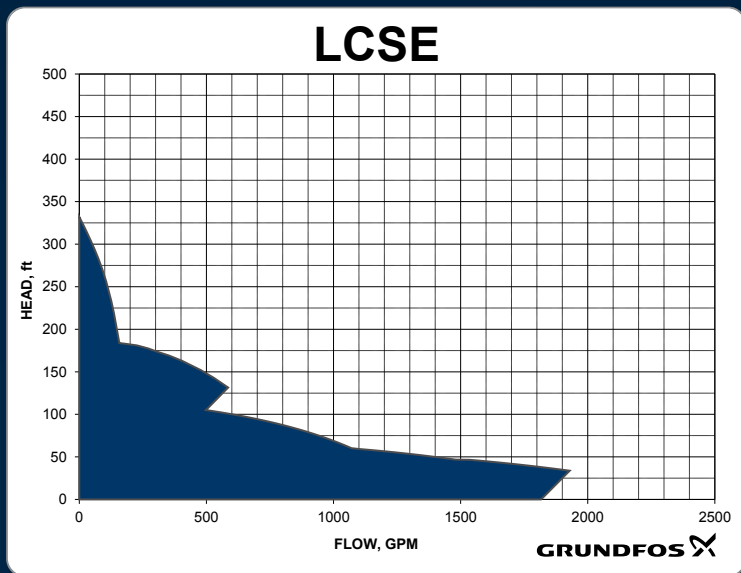

Visit
grundfosexpressuite.com

L-LCSE-SL-01 03-15 (US)

GRUNDFOS CBS Inc.
902 Koomey Road
Brookshire, TX 77423
Phone: (281) 994-2700
Fax: (559) 347-2702

GRUNDFOS Canada
2941 Brighton Road
Oakville, Ontario
L6H 6C9
Phone: (905) 829-9533
Fax: (905) 829-9512

GRUNDFOS Mexico
Boulevard TLC No. 15
Parque Industrial Stiva Aeropuerto
C.P. 66600 Apodaca, N.L. Mexico
Phone: 011-52-81-8144 4000
Fax: 011-52-81-8144 4010

www.grundfos.us

The name Grundfos, the Grundfos logo, and be think innovate are registered trademarks owned by Grundfos Holding A/S or Grundfos A/S, Denmark. All rights reserved worldwide.

GRUNDFOS